

Technical Data



Magnetic sensors

Series MA-99

Type designation **MEN-D04PS/M03-K2**

Item number **6373299132**

Wiring diagram

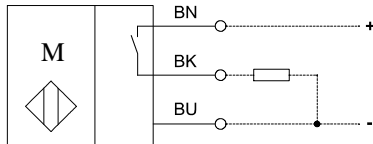

Characteristic features in accordance with EN 60947-5-2

Electrical data

Assured operating distance	S_a	30 mm
Switching function		PNP, open collector, N.O.
Operational voltage range	U_B	8-30 V DC
Switching current		150 mA
Supply current		< 5 mA
Voltage drop	U_d	≤ 2 V
Switching element		GMR, typ. 3 mT
Short-circuit protection		yes
Assembly position		optional
False polarity protection		yes
Corresponding magnet		T-62 N/S

Electromagnetic compatibility (EMC)

Electromagnetic field test	IEC 61000-4-3
Electrostatic discharge test	IEC 61000-4-2
Electrical fast transient immunity test (Burst)	IEC 61000-4-4
Radiated disturbance field strength	EN 55011

Mechanical Data

Enclosure	stainless steel 1.4401
Front cap	PA6
Ambient air temperature	-20 °C ... +70 °C (cabel fixed mounted)
Type of protection	IP67 acc. to IEC 529, EN 60529
Termination type	cabel 3 x 0,14 mm ² x 2 m; PUR-Outer jacket, black

EU Conformity

acc. to directive 2004/108/EC

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual from the here described condition are excluded. Subject to modifications and amendments.

Date of issue: 07.02.2013 / Page 1 of 1
Document: 6373299132_en / Last update: 2 / 0069-13