

SystempaK

Single-P/I Converter

Model KUX122/127

Introduction

Single-P/I Converter (Model KUX 122) employs a semiconductor sensor and converts a pneumatic signal into an electrical signal with high accuracy.



Standard Specifications

Item	Specifications
Input Signal	0.2 to 1.0 kgf/cm ² {20–98 kPa}, 3 to 15 psi, or 0.2 to 1.0 bar, 20 to 100 kPa (Pressure rating 2 kgf/cm ² {200 kPa})
Output Signal	4 to 20 mA DC (Current limit approx. 30 mA)
Power Source	24 VDC $\begin{matrix} +15\% \\ -10\% \end{matrix}$
Power Consumption	0.48 W (MAX.)/1 module
External Load	480 ohms or less with 24 VDC supply. [Note] The maximum allowable external load resistance is calculated as follows: $R = (V - 14.4) / 0.02$ where, R: Load resistance (ohm) V: Supply voltage (volt)
Air Connection	Rc1/4, 1/4NPT internal thread
Ambient Temperature	0 to 50°C
Ambient Humidity	10 to 90% RH
Accuracy	±0.25% FS
Hysteresis	0.10% FS or less
Temperature Characteristics	Zero shift: 0.6% FS/25°C (MAX.) Span shift: 0.6% FS/25°C (MAX.)
Zero Drift	0.5% FS/6 months (MAX.)
Mounting	Wall-mount
Weight	Approx. 1.2 kg
Finish	Case: Zn plating (chromate processed) Cover: Dark beige (Munsell 10YR4.7/0.5)
Housing	Indoor installation type

Model Number Table

1) Single-P/I Converter

Basic Model No.	Selections						Options	Description
	Power Source	Input	Output	Air Piping Connection	Module	Environment		
KUX122	-1							Single-P/I converter
								DC24V
		1						0.2 to 1.0kgf/cm ²
		2						3 to 15psi
		3						0.2 to 1.0bar
		4						20 to 100kPa
		8						19.6 to 98.1kPa
			1					4 to 20mA DC
			3					20 to 4mA DC (Specific order)
				A				Rc1/4
				B				1/4 NPT internal thread
					1			1 point
					2			2 points
						X		Standard
						A		For tropical service (Specific order)
						B		Corrosive atmosphere resistant (Specific order)
							-X	No options


2) Single-P/I Converter Module

Basic Model No.	Selections				Options	Description	
	Power Source	Input	Output	Environment			
KUX127	-1					Single-P/I Converter Module	
							DC24V
		1					0.2 to 1.0kgf/cm ²
		2					3 to 15psi
		3					0.2 to 1.0bar
		4					20 to 100kPa
		8					19.6 to 98.1kPa
			1				4 to 20mA DC
			3				20 to 4mA DC (Specific order)
					X		Standard
					A		For tropical service (Specific order)
					B		Corrosive atmosphere resistant (Specific order)
						-X	No options


Dimensions and Connections

1) Single-P/I Converter (KUX122)

(Unit: mm)

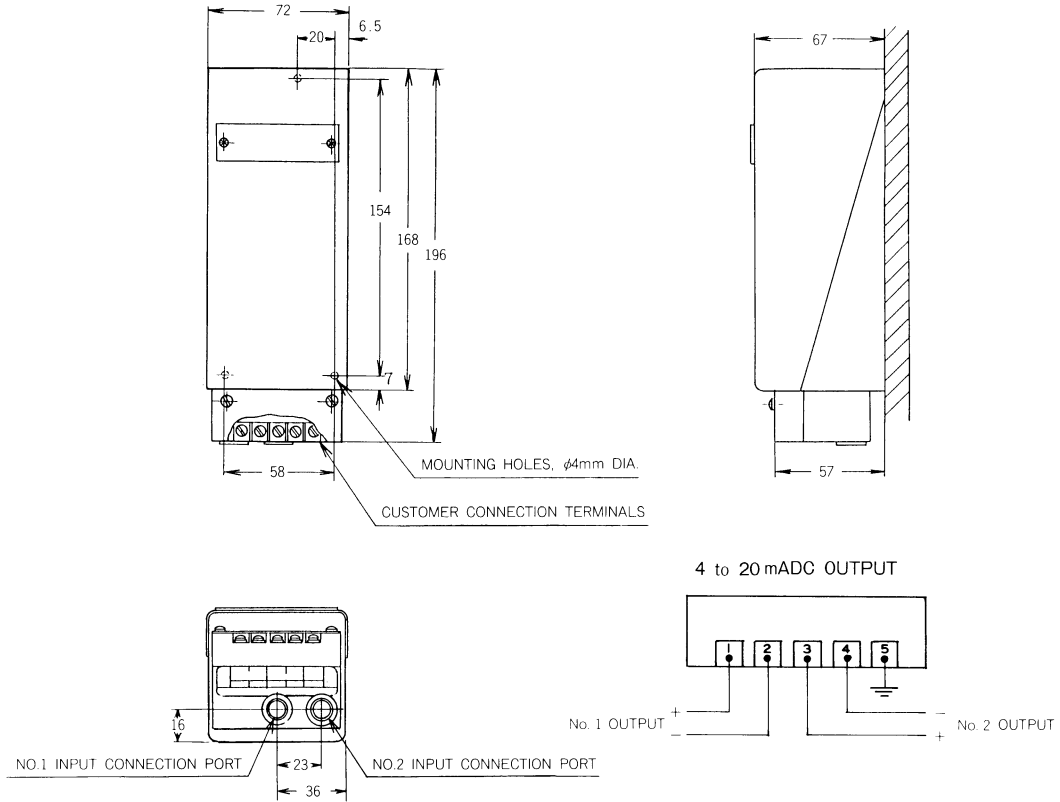

2) Single-P/I Converter Module (KUX127)

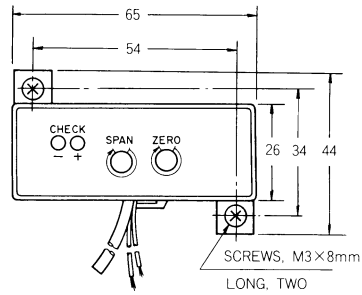

Please read the "Terms and Conditions" from the following URL before ordering or use:

<http://www.azbil.com/products/bi/order.html>

Specifications are subject to change without notice.

azbil

Azbil Corporation
Advanced Automation Company

1-12-2 Kawana, Fujisawa
Kanagawa 251-8522 Japan
URL: <http://www.azbil.com/>

(10)

5th Edition: July 2012

*No part of this publication may be reproduced or duplicated
without the prior written permission of Azbil Corporation.*