


Bobcat

DRAWING NUMBER
SM-19C-7.5R/DPGG17

REV	DATE	DESCRIPTION	BY
A	1/8/99	MODIFIED THE PIN CONFIGURATION	JDC

ENGINEERING FILE COPY
DO NOT REMOVE

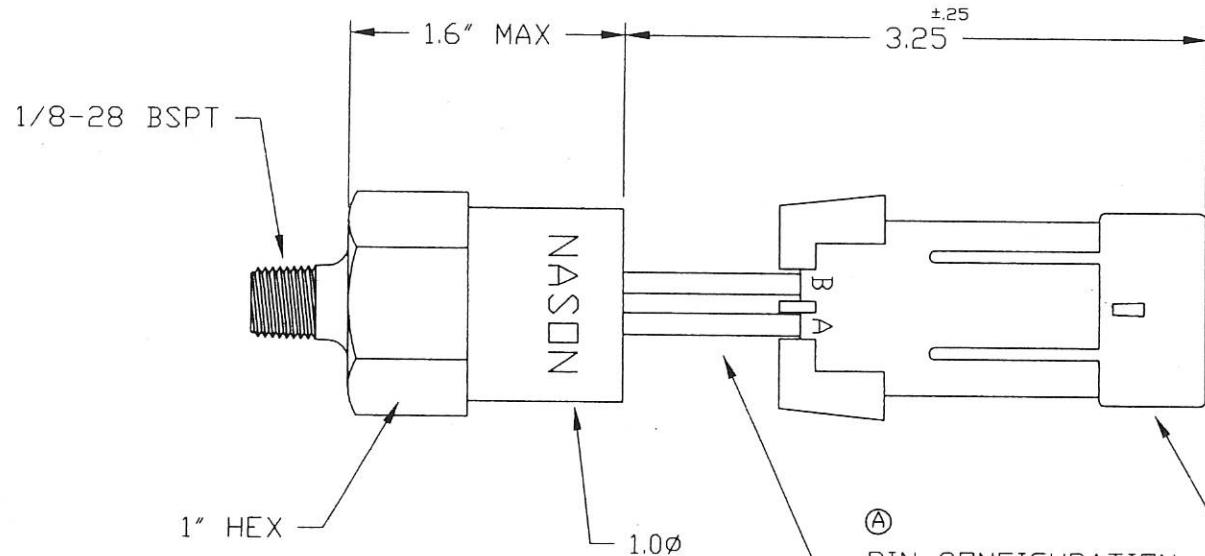

①
PIN CONFIGURATION
PIN A TO N.C. GREEN
PIN B TO N.O. RED

NASON PART #'S
TOWER - PC-1275
PINS - PC-1272
LOCK - PC-1274
SEALS - PG-1273

CIRCUIT: SPDT (SINGLE POLE DOUBLE THROW)
COMMON IS INTERNALLY GROUNDED TO CASE.
TERMINATION: PACKARDS ELECTRIC METRI PACK CONNECTOR
12162000 TO MATE WITH 12052641.

RATING: 5 AMP.
OPERATION: CIRCUIT TO TRANSFER AT 7.5± 1.5 PSI
RISING PRESSURE AND RESET BEFORE
4 PSI FALLING PRESSURE.

MAX OPERATING PRESSURE: 250 PSI.
MATERIALS:
BASE- BRASS
SWITCH HOUSING- G/F NYLON

NASON P.O. BOX 505 WEST UNION, SC 29696 Ph: (864)638-9521 Fax: (864)638-7903		
CUSTOMER	DATE	DRAWN BY
MELROE	1/8/99	J.D.C.
REFERENCE AREA	SCALE	APPROVED BY
6657389 -	1 : 1	<i>[Signature]</i>
TITLE	DRAWING NUMBER	
PRESSURE SWITCH MODEL / SM	SM-19C-7.5R/DPGG17	

6/14/95