

Spindelkugellager

Druckdatum: 24.1.2020


KH 61906 2RZ C TA P4+ DUL - T274

Kugellagerangaben

Lagerbauform	[-]:	KH
Lagertype	[-]:	61906
Käfig	[-]:	TA
Dichtung	[-]:	Deckscheiben beidseitig

Geometrie

d	[mm]:	30
D	[mm]:	47
B	[mm]:	9
Dw	[mm]:	3,969
Z	[mm]:	22
rsmin	[mm]:	0,3
r`smín	[mm]:	0,3
d1	[mm]:	35,1
d2	[mm]:	34,5
dm	[mm]:	38,5
D1	[mm]:	41,7
D2	[mm]:	43

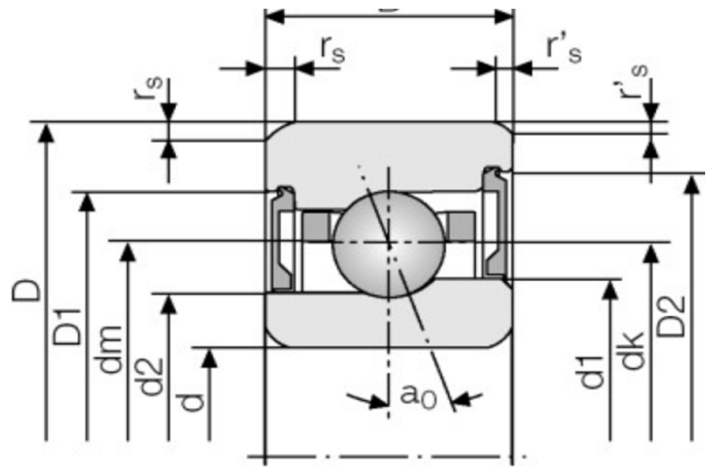

m	[kg]:	0,047
Kontaktwinkel	[°]:	15

Geometri

C	[N]	4.650	
Co	[N]	2.750	
ng	[1/min]	41.000	bei Fettschmierung

Vorspannung

Fv	[N]	23
Cax	[N/μm]	28
Ff	[N]	170

Schmierstoffdaten

n*dm	[mm/min]	2.200.000
Temp min.	[°C]	-50
Temp max.	[°C]	120