

### Fiber Optic Contact Closure Transmission 1-Channel Simplex Contact Closure over Fiber

#### System Design

Video

Fiber Optic Contact Closure Transmitter & Receiver  
VOS-1FOM-SCCT/R provides for the digital transmission of 1-Channel Simplex dry contact closure or TTL data input signal over one fiber. Applications for Alarm Event Triggering, Building Automation and Environmental Control Systems, Fire & Alarm Systems, Gate control, PIR signal Transmission, Traffic Signal Control Equipment, etc.



1  
Contact Closure

Stand-alone or rack-mount. All units of VOS-1FOM-SCCT/R come in an insert card version. The cards can be inserted into our our 14-slot, 19inch 2U, 4U or 6U rack-mountable card cage (VOS-CH02, VOS-CH04 or VOS-CH06).

Data

Single-Mode or Multi-Mode, VOS-1FOM-SCCT/R can support FC /PC or ST/PC Optical connector, can be used in Daisy-Chain system (Need to customize). The Transmission distance range according to the Optical Budget. Manufacturer's standard is: Single-mode 20km or Multi-mode 2km.

Audio




Ethernet

#### Features

- Support Point-to-Point or Daisy-Chain connection
- Dry Contact Closure or TTL data over one fiber
- Multi-mode Fiber Support for Distances up to 2.0 km
- Single-Mode Fiber Support for Distances up to 100 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Stand alone or rack-mount
- Produce according to customer's specifications, providing OEM

#### Typical Configuration

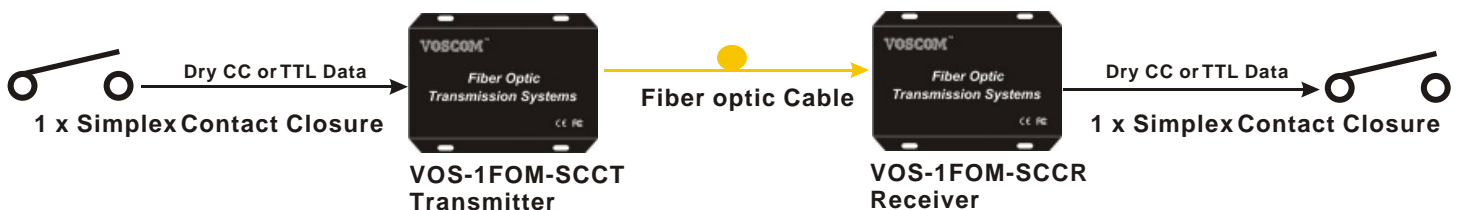

# Contact Closure over Fiber

## Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
VOS-1FOM-SCCMT	VOS-1FOM-SCCMR	Multi-Mode	1310nm	16dB	2km
VOS-1FOM-SCCST	VOS-1FOM-SCCSR	Single-Mode	1310nm	12dB	20km
VOS-1FOM-SCCST-4	VOS-1FOM-SCCSR-4	Single-Mode	1310nm	18dB	40km
VOS-1FOM-SCCST-6	VOS-1FOM-SCCSR-6	Single-Mode	1550nm	25dB	60km

**Note:**

- The Optical Power Budget data fit Multi-mode(62.5/125  $\mu$  m), Single-Mode(9/125  $\mu$  m).
- When using 50/125  $\mu$  m multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

## Specification

<ul style="list-style-type: none"> <li>• Contact Closure</li> </ul> <p>Number of Channels: 1-Channel Simplex CC            Data Formats: Contact Closure, TTL            Data Rate: DC to 200Kbps            Response Time: 2 ms            Relay/Contact Rating: 0.5 A @ 200 VDC            Bit Error Rate: &lt; 10E-9</p>	<ul style="list-style-type: none"> <li>• Connectors</li> </ul> <p>Contact Closure: Terminal Block            Optical: FC/PC or ST/PC Optional            Stand-Alone Power: Screw terminal block            Rack Power: AC line cord</p>
	<ul style="list-style-type: none"> <li>• Electrical &amp; Mechanical</li> </ul> <p>Input Power Requirements: DC 5V@2A            Power Adapter: AC 100V~240V            Power Consumption: &lt; 3W            Stand-Alone Dimensions: 95mm × 70mm × 25mm            Card for 2U Rack Dimensions: 95mm × 70mm × 25mm            Card for 4U Rack Dimensions: 145mm × 170mm × 20mm            Shipping Weight: 1.2kg (include TX &amp; RX)</p>
	<ul style="list-style-type: none"> <li>• Environmental</li> </ul> <p>Operating Temperature: -45° C ~ +75° C            Storage Temperature: -45° C ~ +85° C            Relative Humidity: 0% ~ 95% (non-condensing)            MTBF: &gt;100,000 hours</p>