





- Common alarm annunciator for 6 signals
- Optionally for up to 8 signals
- Closed circuit operation
- Optionally with open circuit operation
- With LED for each fault signal
- Inputs up to AC/DC 300 V
- With relay output for common signal
- Pushbutton for fault signal acknowledgement and function test
- Front surface 96 x 96 mm

Function diagram

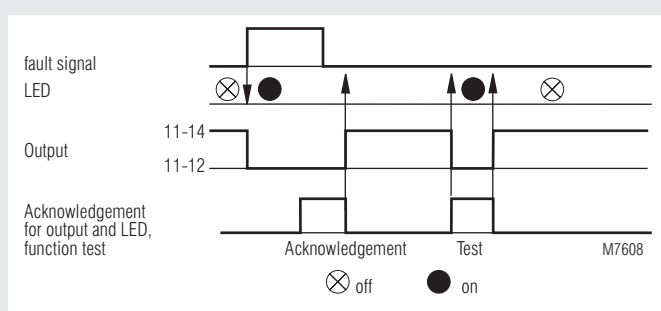

Circuit diagram



EH 9997.11

Approvals and marking



Application

Monitoring of industrial plants and buildings

Indication

LEDs for each fault signal
Continuous light when fault signal applied

Notes

It must be observed, that the fault inputs are not separated from the supply voltage (common terminal A2/N). In case of DC-signals the minus-pole always to be connected to A2. By removing the bridges X1/X3 - X1/X2 on the backside, the function of the fault signal can be changed, so that the faults 5 and 6 will only be indicated optically and the output relay will not be influenced.

The EH 9997 will be supplied unlabeled.
Individual label on demand.

Technical data

Input

Inputs:	between AC/DC 12 and 300 V in 3 sectors; AC/DC 12 ... 70 V, AC/DC 70 ... 160 V, AC/DC 160 ... 300 V
Nominal voltage U_N:	AC/DC 24, 42, 48 V AC 110 ... 127, 220 ... 240 V
Special voltage:	
external resistor	
DC 60 V:	820 Ω ZWS 8 SL
DC 110 V:	2,2 k Ω ZWS 20 SL
DC 220 V:	4,7 k Ω ZWS 20 SL
Voltage range:	0,8 ... 1,1 U_N
Nominal consumption:	AC 230 V, 9 VA
	DC 24 60 110 220 V
	1 2,5 5 10 W
Nominal frequency:	50 / 60 Hz

Output

Contacts	
EH 9997.11:	1 changeover contact
Thermal current I_{th}:	6 A
Switching capacity	
to AC 15	
NO contact:	10 A / 230 V IEC/EN 60 947-5-1
NC contact:	5 A / 230 V IEC/EN 60 947-5-1

Technical data

Electrical life	IEC/EN 60 947-5-1
to AC 15 at 3 A, AC 230 V:	0,1 x 10 ⁶ switching cycles
Short circuit strength	
max. fuse rating:	6 AgL IEC/EN 60 947-5-1
Mechanical life:	> 30 x 10 ⁶ switching cycles

General data

Operating mode:	Continuous operation
Temperature range:	- 20 ... + 60°C
Clearance and creepage distances	
overvoltage category / contamination level:	4 kV / 2 IEC 60 664-1
EMC	
Electrostatic discharge:	8 kV (air) IEC/EN 61 000-4-2
HF-irradiation:	10 V / m IEC/EN 61 000-4-3
Fast transients:	4 kV IEC/EN 61 000-4-4
Surge voltages between wires for power supply:	2 kV IEC/EN 61 000-4-5
between wire and ground:	4 kV IEC/EN 61 000-4-5
Interference suppression:	Limit value class B EN 55 011
Degree of protection	Housing: IP 40 IEC/EN 60 529
	Terminals: IP 20 IEC/EN 60 529
Housing	Thermoplast with V0 behaviour according to UL subject 94
Vibration resistance:	Amplitude 0,35 mm, frequency 10 ... 55 Hz IEC/EN 60 068-2-6
Climate resistance:	humid heat IEC/EN 60 068-2-30
Terminal designation:	EN 50 005
Wire connection:	2 x 2,5 mm ² solid or 2 x 1,5 mm ² stranded wire with sleeve DIN 46 228-1/-2/-3/-4
Wire fixing:	Flat terminals with self lifting clamping piece IEC/EN 60 999-1
Mounting:	2 clamps with screws
Weight:	300 g

Dimensions

Width x height x depth:	96 x 96 x 129 mm
Front panel cut-out:	Diameter 91 ⁺¹ mm

Standard type

EH 9997.11	AC 220 ... 240 V	50/60 Hz	AC/DC 160 ... 300 V
Article number:	0013214	stock item	
• Output:	1 changeover contact		
• Nominal voltage U _N :	AC 220 ... 240 V		
• Inputs:	AC/DC 160 ... 300 V		

Variants

EH 9997/013:	During function test, common signal will not be operated
EH 9997/074:	Open circuit operation
EH 9997/075:	8 signals; all stored, indicated and switching common output

Ordering example for variants

EH 9997.11 /	AC 230 ... 240 V	AC/DC 160 ... 300 V	50/60 Hz
			Nominal frequency
			Inputs
			Nominal voltage
			Variant, if required
			Contacts
			Type

Connection example

